



Greening wireless communications: Status and future directions

Pablo Serrano^{a,*}, Antonio de la Oliva^a, Paul Patras^b, Vincenzo Mancuso^{a,c}, Albert Banchs^{a,c}

^a University Carlos III of Madrid, Spain

^b Hamilton Institute, NUI Maynooth, Ireland

^c Institute IMDEA Networks, Spain

ARTICLE INFO

Article history:

Available online 29 June 2012

Keywords:

Wireless networks
Energy efficiency
Power consumption

ABSTRACT

In recent years, concerns on energy consumption and greenhouse pollution due to the operation of wireless devices have triggered a vast amount of research work on the so called *green* wireless technologies, leading to new, energy-aware proposals. Even for the case of battery powered devices, where energy conservation is a key design goal, new approaches have been proposed, based on a better understanding of the cost-performance trade-offs introduced by energy efficient operation, while increasingly focusing on emerging communication technologies, e.g., body sensor networks, MIMO or LTE. This paper presents a survey of the recent proposals for green wireless communications, with a view to understanding the most relevant sources of inefficient energy consumption and how these are tackled by current solutions. We introduce a classification of the existing mechanisms based on their *operational time-scale*, discuss the most important techniques employed to date from this perspective, analyze the employed evaluation methodologies and undertake a quantitative comparison of their performance gains. Following this analysis, we identify the key challenges yet to be addressed by the research community, as well as several possible future directions towards greener communications.

© 2012 Elsevier B.V. All rights reserved.

1. Introduction

The number of wireless devices has increased tremendously in the recent years, with applications ranging from the now popular mobile data services to video streaming, surveillance, smart homes and healthcare monitoring. Further, recent forecasts envision the number of mobile-connected devices will exceed the world's population by the end of this year, while the mobile data traffic will increase 18-fold in the next 5 years [1]. Under such predictions, energy expenditure at both infrastructure side and within battery powered wireless nodes is becoming a major concern for telcos, industry and scientific community. As a consequence, increasing effort is devoted to designing solutions that improve the energy efficiency of sensors, portable computers, mobile phones, access points and base stations.

Given the rapid and heterogeneous development of wireless technologies, the mechanisms proposed for reducing energy consumption target different scenarios, from cellular network topologies to personal area networks, while the limitations of the existing architectures have been tackled at different layers of the protocol stacks running on wireless devices. Due to the vast number of re-

search papers on this topic, recent reviews attempt to classify the existing proposals in order to identify their advantages, limitations and potential improvements within specific technologies. Towards this end, Jones et al. provided one of the first comprehensive summary of mechanisms that address energy efficiency within different components of the networking stack [2], while more recently a number of papers surveyed such efforts in cellular, WiFi and sensor networks. For example, Mancuso et al. investigated proposals that reduce the energy demand and operational costs in cellular networks [3], a schematic description of green approaches to mobile cellular networking has recently appeared in [4], power saving techniques for wireless local area network topologies are discussed in [5,6], while sources of energy consumption and directions towards energy conservation in wireless sensor networks are systematically classified in [7].

However, none of the existing surveys provides a comprehensive vision of the current state-of-the-art mechanisms for green wireless communications; indeed, no previous study has tackled a classification of energy-aware schemes from a broad perspective, in order to compare performance across technologies and therefore provide an outlook for future research directions, which shall take into account the increasingly-heterogeneous wireless environment. In contrast, here we provide (among other contributions) a *qualitative* and a *quantitative* comparison of existing green mechanisms, by thoroughly reviewing previous work and identifying,

* Corresponding author. Address: Avenida de la Universidad 30, Edif. Torres Quevedo, E-28911 Leganés, Madrid, Spain.

E-mail address: pablo@it.uc3m.es (P. Serrano).

when possible, both the network load under which a mechanism is effective and the savings introduced.¹

We conduct a comprehensive analysis of the proposals for green wireless networking, with the goal of understanding the benefits and shortcomings of existing mechanisms. The scope of our study spans across personal area networks (PANs), wireless local area networks (WLANs), and wireless metropolitan area networks (WMANs). More specifically, for the case of WMANs we restrict ourselves to works that target 3G or WiMAX cellular networks, as well as homogeneous multi-hop 802.11 WiFi deployments; for the case of WLANs we stick to 802.11-based enhancements, while for the case of PANs we select a few representative sensor and body area deployments.

The paper is structured as follows. We first identify, in Section 2, the key sources of energy consumption at different network entities and at different layers of the nodes' stacks, and discuss how those are tackled in different technologies, with a view to understanding their inherent challenges and benefits. In Section 3, we present a general classification of the existing proposals based on their operational time-scale, to clearly identify similarities and differences between the mechanisms considered. Following this analysis, in Section 4, we perform a threefold comparison of these mechanisms based on their performance evaluation methodology, energy savings introduced and distribution of research efforts across time-scales. Finally, we discuss several promising research directions in Section 5 and summarize our review in Section 6.

2. Identifying the causes of inefficient energy consumption

To design solutions that improve energy efficiency in wireless networks, it is essential to first identify the main sources of energy consumption in wireless devices, and understand how wireless protocols and operations affect the energy demand. With this rationale in mind, we proceed with the analysis of power consumption in base stations, mobile devices, and short-range wireless devices, according to the figures reported in the literature (see Table 1). Then, we identify which are the elements and mechanisms responsible for inefficient energy utilization (see Table 2).

This analysis will prove indispensable in assessing the techniques employed by the proposals we review in this survey, which specifically address one or more of the inefficiencies we point out in this section, in order to increase network lifetime, reduce operational costs or improve the ecological footprint of such networks.

Since we consider technologies developed for different network scopes, we start by analyzing the relative impact of the use of the wireless interface for each type of network deployment. More specifically, in Table 1 we summarize the typical energy consumption values for different types of devices. As the table illustrates, the relative energy consumption of the wireless interface largely varies among the devices composing the network. Differences range from the case of mobile phones, in which the efficient implementation of the stand-by mode² results in extremely low power consumption values, to the case of base stations, in which more than half the energy consumption is caused by cooling and power amplifiers drainage. These dissimilarities in the relative power consumed by the wireless interface motivate different approaches to reduce the energy expenditure of different types of devices; still, throughout the survey we will also identify several commonalities among them.

Despite the different energy demands of current wireless devices, we identify a set of key sources that determine inefficient

Table 1
Relative consumption of the wireless interface per device type.

Device	Scope	Power consumption (W)	
		Total	Wireless
Base Station [3,8]	WMAN	300-3000	20-60 (<20%)
Access Point [9,10]	WLAN	10	(WiFi) 2.0 (10%)
Mobile Phone (screen on) [11]	WMAN, WLAN	1.5	(WiFi) 1.0 (66%)
Mobile Phone (screen off) [11]	WMAN, WLAN	≈ 1.0	(WiFi) 1.0 (100%)
Fashionable [11]	PAN, WLAN	1.78	(WiFi + Bluetooth) 1.0 (56%)
Computer [12]			

power usage and which are encountered to certain extent in all types of network entities. In what follows, we discuss the underlying factors that cause these inefficiencies for the different network scopes considered. Table 2 summarizes our discussion on inefficient energy utilization, by listing both the source of inefficiency and the wireless technologies affected by such inefficiencies.

First of all, several papers in the literature argue that network infrastructure is often unnecessarily powered on, especially when the number of users and their traffic load are low [13–16]. This common practice guarantees high degrees of coverage and service availability, but is responsible for a large amount of energy consumption, which could be tackled by intelligent sleep policies. Similar considerations apply at the client side, where cellular phones could go into sleep mode by switching their transceivers off during inactive periods [17]. Likewise, though at different time-scales, sleep mode operation could be enabled for WLAN personal devices engaged in lightweight communications [18], or wireless sensors that will be only requested to propagate information upon certain triggering events [19].

A second important cause of energy consumption is rooted in the hardware design. Indeed, the hardware inefficiencies have been pointed out by many authors, e.g., [20,3,8,21]. This body of work addresses power-hungry processors, poor design of power amplifiers, inefficient heat dissipation demanding intense cooling, etc. Unfortunately, overcoming hardware inefficiency involves completely redesigning the wireless equipment, which is a costly and time consuming endeavor, and thus subject to practical concerns.

Although hardware inefficiencies are difficult to tackle, there exist different degrees of flexibility at various layers of the networking stack of the wireless devices. Existing works indicate most of these components often lack an energy-aware driven design as well. For example, the PHY layer is frequently implementing sub-optimal rate selection and transmission power control algorithms [22,21]. The MAC operation uses inappropriate contention parameters and yields non-optimal and avoidable collision rates or unsatisfactory and unfair transmission schedules [23,24]. Similarly, routing protocols for wireless networks neither use energy as a path metric, nor leverage on node density to minimize energy consumption [25]. Further, coordination between these layers, i.e., PHY, MAC and routing, is missing most of the time [26].

Finally, we observe that, regardless of the network scope, current deployments are not carefully planned, thus suffering from energy wastage due to increased densities, over-provisioning, interference caused by coverage overlapping and occasionally due to the co-existence of different technologies, e.g., 802.11 WLANs and Bluetooth [27,10,28,12].

¹ Given the lack of standardized benchmarks and scenario definitions, which prevents the repeatability of previous works, the numerical results from our analysis should be taken with a *grain of salt*.

² More specifically, with no screen nor wireless interface activated, and idle CPU.

Table 2
Main sources of inefficiency in energy consumption.

Source	Factors	Network scope
inefficient duty cycling	DRX/DTX parameters, sleep protocol; inappropriate MAC behavior	ALL
HW inefficiency	Unnecessary power drainage from power amplifiers; too frequently listening in idle mode	ALL
PHY inefficiency	Improper rate adaptation (MCS selection); suboptimal TX power selection	WLAN, PAN
MAC inefficiency	Energy-agnostic scheduling; suboptimal contention scheme (high collisions rate); interference due to uncoordinated transmissions	ALL
inefficient routing	Node density agnostic topology formation and routing	PAN, WLAN
lack of coordination between PHY/MAC/routing	Non energy-optimal resource Allocation	PAN, WLAN
deficient network planning	Increased node density; Non energy-proportional operations; unnecessary high capacity provisioning; overlapping networks	ALL
inter-tech interference	Lack of harmonization among multiple technologies causing interference and collisions	PAN, WLAN

3. Mechanisms for improving energy efficiency

In this section, we provide an overview of the studied mechanisms for improving energy efficiency in wireless deployments. Recent surveys have focused on a specific network scope, i.e., WLAN [5,2,6], PAN [7] or WMAN [4], and have proposed different classifications, based on e.g., the *layer* at which the mechanism operates (PHY, MAC, cross-layer, etc.) or the *device* that runs the respective mechanism (Access Point, Base Station, clients, etc.). In contrast to these taxonomies, and motivated by the identification of the sources of energy consumption described in Table 2, our classification builds on the different *time-scales* of the algorithms considered. More specifically, we will consider the following four time-scales, illustrated in Fig. 1:

- **Frame:** The mechanisms in this category operate on a per-frame basis, i.e., they update the corresponding variables right before the actual transmission of a frame, based on the observed network conditions. Typical variables include, e.g., transmission power, modulation coding scheme, or frame length.
- **Super-frame:** Here we consider the mechanisms that regulate the protocol behavior between several transmissions. Precisely, here we consider all MAC-related mechanisms, this including both adapting the MAC parameters (e.g., scheduler, contention variables) and configuring the power saving schedule of the wireless interface.
- **Flow:** This category includes the mechanisms that adapt to the *load* in the network, and correspondingly tune the configuration of the resources available to best serve the traffic. This typically involves algorithms that are executed across various hops (e.g., adaptive routing) or the use of inter-technology cooperation (e.g., relay traffic using the WiFi interface).
- **Usage pattern:** Finally, we include in this category those mechanisms whose aim is to dynamically configure the network deployment, taking advantage of the large variations of the user arrival rate with respect to time of day (e.g., office vs. non-office hours). The main feature of these mechanisms is that they provide *infrastructure on demand*, thus saving not only the energy consumed by the wireless interface, but also almost all the energy consumed by the complete device.

Based on these time-scales, the resulting taxonomy for the energy saving proposals is illustrated in Fig. 2. We next provide an analysis of these proposals in an increasing order of their operational time-scales.

3.1. Frame level time-scale

As described above, the mechanisms in this category modify the transmission parameters on a per-frame basis, which is also known as *transmission strategy diversity*. The most common parameters that can be tuned are the transmission power [33,34], the used data rate (i.e., modulation coding scheme) [29,26], or a combination of those and other metrics such as the frame size [30–32]. One key challenge when using these schemes is the estimation of the channel conditions. Given that the objective is to maximize the amount of information transmitted per unit of energy consumed, the algorithms need an accurate sampling of, e.g., the noise level to guarantee a successful delivery without incurring energy wastage.

The amount of energy savings introduced by these mechanisms is bounded by the power consumption of the interface, relative to the total power consumption of the devices. Thus, based on the values of Table 1, it is clear that the larger the relative consumption of the interface, the higher the motivation to maximize the efficiency when performing wireless-related operations. Furthermore, even if the energy savings are not very high, for devices running on batteries almost any gain is worth the effort of implementing an extension. Therefore, new mechanisms extending the standard functionality are quite common in PANs, and also in WLANs, but are not very frequent in the case of WMANs.

3.2. Super-frame level time-scale

Here we consider the mechanisms operating on a per multiple frames basis, i.e., modifying the parameters that specify how each node's frames gain access to the wireless medium, and when the interface is set to a *doze/sleep* mode. We divide the set of existing mechanisms in two groups: (i) *MAC scheduling* proposals, which configure the parameters of the access protocols, and (ii) *MAC on demand* approaches, which adapt the availability of the wireless interface based on the expected arrival time of the next frame.

Proposals in the category of **MAC Scheduling** can be further classified depending on the MAC layer considered, namely: contention-based MACs (e.g., the EDCA channel access in IEEE 802.11 WLANs), coordination-based MACs (e.g., the Guaranteed Time Slot of IEEE 802.15.4), or hybrid protocols that alternate between contention-based and contention-free periods. Contention-based MACs are typically used where no strict QoS guarantees are required, i.e., in PAN and WLAN deployments. The main objective of these solutions is to reduce the overhead caused by contention

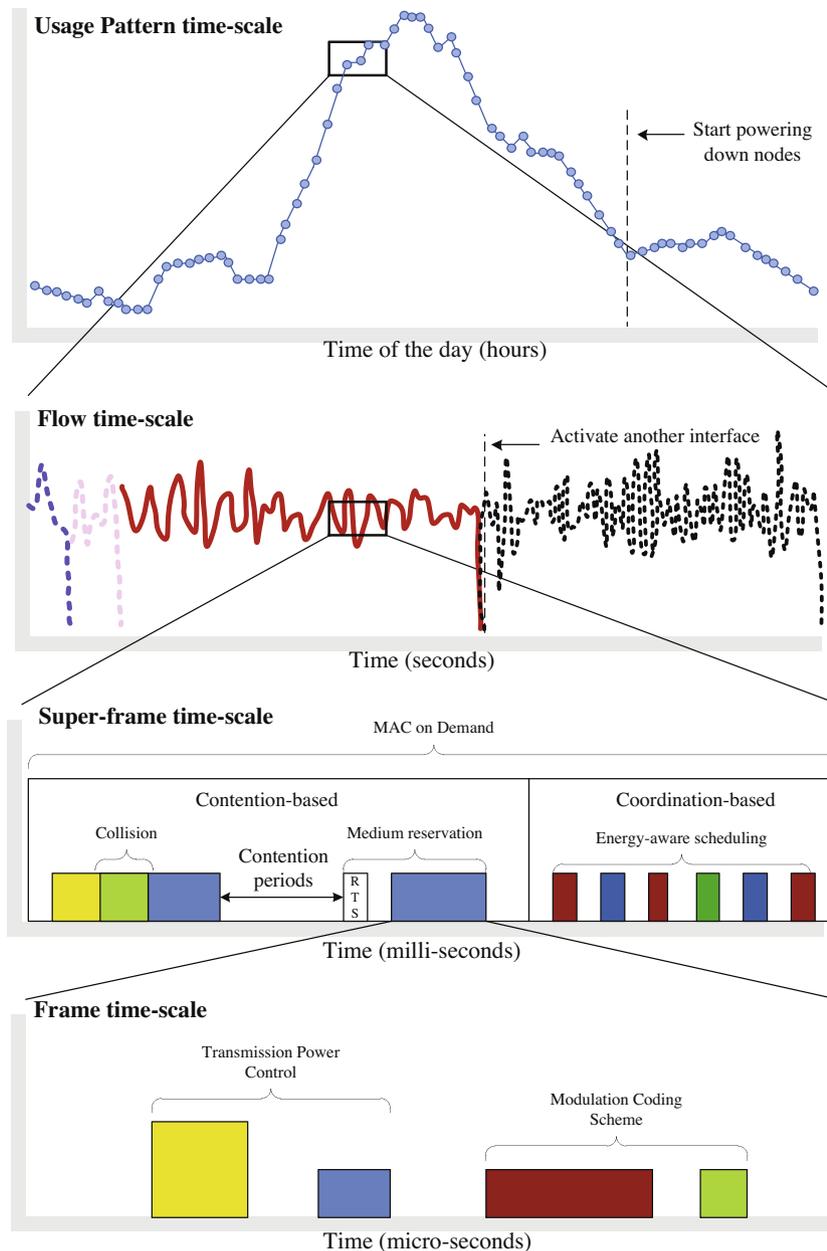


Fig. 1. Operational time-scales of the energy-saving algorithms.

mechanisms, either by optimally configuring contention parameters such as in [24,23] or introducing new mechanisms used to reduce the number of transmissions, such as [35,36].

Coordination-based MAC schemes rely on a central node in charge of scheduling the transmissions for all the nodes in the network, hence avoiding contention and collisions, and are equally available for the three considered network scopes. For instance, GTS has been proposed for IEEE 802.15.4 [47], and HCCA for IEEE 802.11 [83]. Many schemes have been suggested for scheduling in IEEE 802.16, since the standard does not provide details on scheduling and reservation procedures. In fact, IEEE 802.16 only defines bandwidth allocation and QoS mechanisms, including scheduling classes, but it does not define a precise scheduler. Due to scalability and complexity issues, schedulers implemented in operational IEEE 802.16 base stations use rather simple scheduling schemes, e.g., the Weighted Round Robin or Stratified Round Robin [84] schedulers have been widely adopted. The use

of coordination-based MAC, furthermore, eases the use of sleeping mechanisms, as transmission times can be determined in advance and therefore nodes are not required to spend much time in the idling or listening states. We also include in this category the works that, even if they use a distributed MAC layer such as EDCA for IEEE 802.11e, obtain energy savings from the coordination performed by a central point, responsible for e.g., configuring global optimal Power Saving Periods [42] or contention parameters [32]. Among the solutions using a true Coordinated MAC, we encounter mechanisms that enhance the standard TDMA operation, such as [26,31,37,41], and solutions proposing completely new coordination mechanisms based on a diversity of ideas, such as fuzzy logic [38], reduction of duty cycle based on strict coordination [40], use of external triggers for synchronization [39] or application aware schedulers [43].

Some coordination-based mechanisms introduce a period of time during which stations willing to access the medium contend

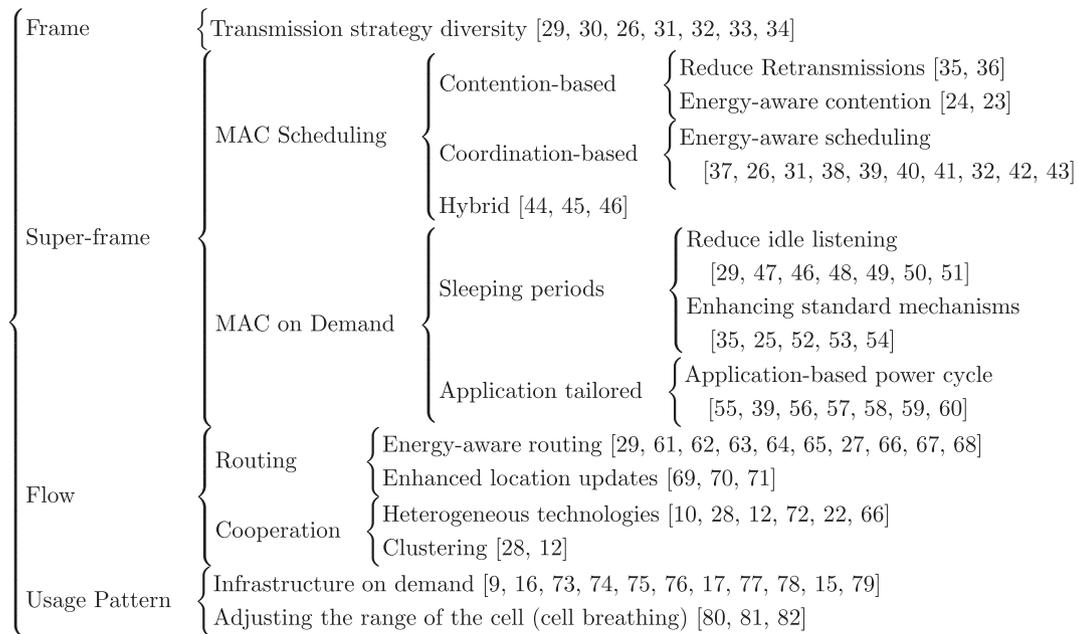


Fig. 2. Time-scale classification of energy efficient mechanisms.

to for subsequent schedules. We denote these MAC schemes, based on alternating contention-based and contention-free operations, as *hybrid* approaches [44–46]. With these, the main mechanisms to achieve energy efficiency consist of reducing the overhead of the contention-free part, minimizing the collision probability on the contention interval, and tuning the beacon frequency to reduce the length of idle periods.

For the case of **MAC on Demand** proposals, the main objective is to take advantage of idle periods to configure the wireless interface in a low energy consumption state (i.e., the so-called *sleep* or *doze* state). Existing protocols enable this sort of energy savings through the use of a centralized device; for the case of 802.11 WLANs this is the Power Saving Mode (PSM [18,85]), for cellular communications in WMANs some notable examples are the Discontinuous Transmission (DTX) and Discontinuous Reception (DRX) patterns standardized by 3GPP [86], while in IEEE 802.16 deployments a control channel is used for traffic advertisement [87]. In particular, IEEE 802.16 defines three types of sleep-window-based Power Saving Classes [88], to adapt to different traffic profiles with different procedures of activation/deactivation, policies for adapting the sleep-window duration, and policies for mobile station availability for data transmission. Namely, Power Saving Classes of Type I are meant for best effort and non-real-time traffic, Power saving Classes of Type II are for real-time traffic, and Power Saving Classes of Type III are for *other* traffic (e.g., multicast and management traffic). A similar mechanism is also available for PANs, where, e.g., traffic can be advertised through beacons in 802.15.4 deployments [89].

There are two different set of approaches building on this sort of mechanisms, depending on whether they have been designed as general-purpose or rather they have been tailored to a specific application.

On one hand, there are *application-agnostic* proposals that aim at maximizing performance under general traffic conditions. Given that, even in the absence of traffic, stations have to periodically poll the centralized device for packets, there is some energy wastage related to this operation. Based on this observation, some approaches focus on reducing the time spent in idle listening [29,46,47,51], which constitutes one of the major sources of energy consumption. Some other approaches focus on reducing the energy consumption of idle listening, not the time spent performing this

task. These approaches use novel sampling techniques to detect whether a frame is being transmitted, such as [48,50]. Finally some other proposals try to reuse the sleep/wake up concepts in other contention periods [49].

On the other hand, there are *application-tailored* proposals, which are specifically designed to reduce the power consumption when a given application is being considered [39,55–59]. Typical examples include the cases of periodic patterns, e.g., sensing or GPS localization applications [60]. For the case of healthcare applications, some cross-layer approaches use the heartbeat of a patient to synchronize the activities of the various body sensors [39].

3.3. Flow level time-scale

Next, we discuss the mechanisms that operate at a macroscopic scale, adapting the operation of the network to the number of flows and their demand. Existing approaches can be classified into two different categories: (i) those that adapt the routing protocol to maximize network lifetime, and (ii) those that enable additional wireless interfaces to accommodate incoming traffic demands.³

Energy-aware routing has been widely studied in PAN environments, as devices operate under batteries and the network lifetime is determined by the node with the least capacity remaining. The key challenge in these deployments is to properly share the relaying functionality, i.e., deciding which nodes are required to perform forwarding in addition to the sensing operations [61–64]. A similar problem arises for the case of ad hoc and mesh WLANs [65,27], and even for the case of WMAN when they are extended with relay nodes [66–68]. Other solutions reduce the amount of energy spent on location updates and idle mode updates, by introducing new mechanisms for paging [69–71].

Another set of proposals build on the availability of various interfaces at the same node, running the same or multiple technologies. Some works propose to use a *primary* wireless interface for heavy data exchange, and a *secondary* interface for basic control operations, like paging or localization. In this way, the main wireless interface is used *on demand*, while the other energy efficient

³ Note that when a given node is not using any of its wireless interfaces, it could be completely powered down. However, given the time required to power on/off a device, we classify these mechanisms in the next section.

interface is devoted to periodic, low-traffic operations [10,22]. This use of heterogeneous interfaces can also be applied to inter-technology operations, where it is typical to perform data clustering over the low power interface and then use the other interface as a gateway to the Internet. These sort of heterogeneous schemes have been proposed for WiFi + Bluetooth [12], WiFi + 802.15.4 [10], and WiFi + 3G [28,72,66].

3.4. Usage pattern time-scale

We classify in this section those mechanisms that aim at re-configuring the network deployment, which requires non-negligible time (e.g., multiple seconds for the case of a 3G base station [15]) and therefore has to be performed on large time-scales, based on variations of user arrival rates. Therefore, these mechanisms are not practical for sensor or personal area networks, as these operate at smaller time-scales and the number of users involved is rather limited.

These *infrastructure on demand* mechanisms introduce the largest energy savings, as their aim is to power down almost completely the wireless device; as described in Section 2, this is of particular interest for the case of WMAN deployments, given that most of the energy consumption of the infrastructure is due to non-wireless hardware [74–76,17,77,79]. The main challenge posed by these proposals lies in deciding when to switch off a base station, given the impact on the service experienced by users – in particular, the potential reduction in coverage. Similar considerations can be made for the case of very dense WiFi deployments in office environments [9,16]. For the case of residential environments, a smart management of Access Points/ DSL routers can enable further savings on the operator's infrastructure [73].

Given the amount of time required to switch the state of a base station, some authors have addressed the design of more efficient mechanisms towards this end [78]. Instead of performing these switches, other works propose to dynamically tune the coverage areas (i.e., *breathing* or *zooming*), to adapt to the user density [80–82].

4. Comparing the mechanisms for green wireless communications

In this section, we undertake a comparison of the mechanisms analyzed above, with a view to the employed evaluation methodologies, reported performance gains and the distribution of current research efforts. Thus, our aim is threefold: first, we seek to investigate whether the three evaluation strategies available, namely analysis, simulation and experimentation, are equally spread among the different scenarios, or rather some scenarios are typically tackled with a particular methodology; second, we want to quantitatively compare the energy savings across technologies, to understand if there are common trends among them; finally, we compare the volume of research works within each group of the proposed operation time-scale based classification of the mechanisms, to understand the focus of previous efforts.

4.1. Performance evaluation methodologies

We first discuss the type of performance evaluation carried out when proposing a new energy efficient mechanism. To this end, we consider the three usual categories:

- **Experimental evaluation:** We classify in this category those proposals that carry out various forms of prototype-based evaluation in a real testbed, at least as a “proof of concept”. Note

Table 3
Type of performance evaluation.

Scope	PAN	WLAN	WMAN
Analysis	[24] [27]	[23] [85] [16] [70] [71]	[54] [13] [76] [17] [15] [79]
Simulation	[29] [44] [30] [37] [26] [45] [31] [38] [39]	[41] [25] [36] [18] [49] [32] [33]	[74] [43] [65] [75] [81] [82] [51] [77] [78]
Experimentation	[35] [47] [55] [40] [56] [46] [48] [19] [21]	[9] [10] [57] [28] [12] [52] [58] [59] [42] [53] [69] [50] [90]	[73] [60] [72]

that, for the cases where proposals perform a *mixed* evaluation, i.e., presenting prototype results jointly with those from simulations (e.g., [73]), we include those in this category.

- **Simulation assessment:** We group in this category the mechanisms whose performance is assessed only via simulations and do not present any experimental results. Even though there exist some works that use measurements obtained experimentally and/or vendor data sheets as input parameters for the conducted simulations (e.g., [49]), in case no experimental report on the validity of the proposal is explicitly provided, they are classified in this category.
- **Analytical studies:** Finally, we classify in this category those works aiming at an analytical understanding of the energy consumption of wireless devices, including both analytical models of power consumption, like e.g., [85], and numerical analysis of the maximum bounds achievable, like e.g., [13].

The resulting classification following the above guidelines is presented in Table 3. We first note that the total amount of reviewed work per network scope is relatively well balanced, as PAN, WLAN and WMAN have a similar number of references (around 20). In contrast, the distribution of work per methodology is not equally distributed across scopes, with analytical studies accounting for approximately one tenth of the total number of references, while simulation and experimentation studies account each one for approximately one half of the remaining references.

An immediate observation from the table is that, as compared to PAN and WLAN, for the case of WMAN there has been relatively very little experimental work. This can be easily explained considering the difficulties of running experiments in large-scale testbeds: not only the required number of users is large and tests should last for long periods of time (given the typical usage patterns), but also the hardware required is expensive and not available as commercial off-the-shelf (COTS) devices. Because of these difficulties, some alternatives build on collaborations between network operators and academic institutions, but these are typically limited to the exchange of network traces for their analysis (e.g., [75]). In contrast to this scarcity of experimental work, for the case of WMAN there are significantly more analytical studies than for the cases of PAN and WLAN.

For the case of PAN and WLAN, the situation is somehow the opposite to the one described above. For these network scopes, there are relatively fewer analytical studies, with work based on simulation or experimentation accounting for most of the references reviewed. We also note that the split between these two methodologies is well balanced, although there is some slight bias towards experimentation for the case of WLAN, which can be easily explained given the huge success of the 802.11 technology and the corresponding availability of COTS devices, many integrated with current laptops, mobile phones, PDAs, etc.

The above qualitative analysis of the methodology used for the performance evaluation shows that there are some significant differences among network scopes, a result that can be explained based on the required size of the network deployment and the

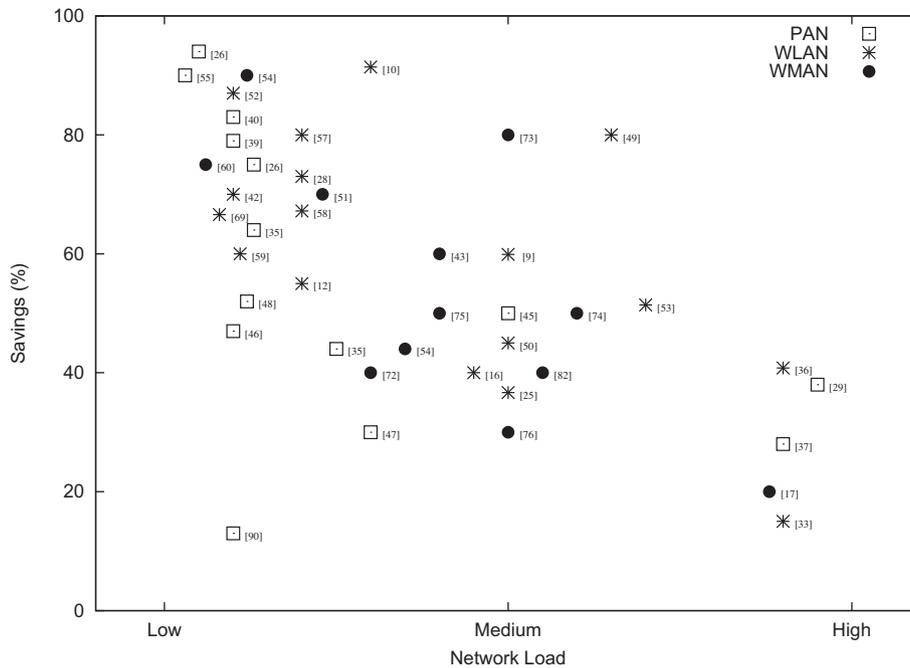


Fig. 3. Typical savings achieved depending on the network load.

availability of COTS devices for each considered technology. We next provide a quantitative comparison of the savings introduced by the different proposals.

4.2. Quantitative comparison

Our next aim is to quantitatively analyze the gains derived from the use of the mechanisms considered in our survey. More specifically, we want to compare the *energy savings* introduced by each proposal, regardless of the methodology used for the performance evaluation or the network scope considered. We identify two key challenges when performing a fair comparison of the existing mechanisms, namely: (i) specifying a common performance metric, as the considered figures significantly differ (e.g., reduction in Watts vs. bits per Joule); and (ii) characterizing the network operating conditions, as the considered load also shows significant variance (e.g., paging schemes with little, if any, traffic vs. duty cycles approaching 90%). We next describe how we have addressed these challenges.

To obtain a **common metric**, which we will refer to as *savings*, we have to define a unified figure of merit on every paper. While in many cases authors provide explicit figures on reduction in energy consumption, in some cases we had to perform the corresponding computation to translate, e.g., improved network lifetime, into energy savings. Furthermore, it should be noted that these savings may refer to the energy consumption of different elements: while reductions in terms of energy consumption typically consider only the wireless interface, battery lifetime improvements are associated with the energy consumption of the whole device. Whenever it was possible, we obtained the figure related to the wireless interface, but in some situations this was not feasible, therefore, some bias was unavoidably introduced when comparing against the works considering the overall consumption of a device.⁴

⁴ It is worth remarking that, even for the case of analytical studies, there are non-negligible differences among works, in terms of, e.g., the number of energy consumption states that an interface undergoes, or the presence/absence of transient conditions when switching between states.

The second challenge is to understand the **operating conditions** of the scenario when carrying out the performance evaluation. This is also required because it would be unfair to compare, e.g., resource on demand mechanisms, which introduce the largest gains when there is little traffic in the network, with rate adaptation mechanisms, whose improvements are only noticeable when the wireless interface is sending traffic. We note that this is a much more difficult challenge than the previous one, not only because there is no common definition of network load across technologies (e.g., traffic rate in packets/s, duty cycle), but also because the type of the arrival process has dramatic consequences on performance (e.g., constant vs. Poissonian). Given these difficulties, we decided to use the following coarse categories to estimate the network conditions:

- **Light load:** In these cases, the network is carrying little, if any, traffic. Typical examples include sensor networks tailored to health monitoring, or paging-like mechanisms.
- **Medium load:** Here we consider proposals tackling *average* duty cycles ($\approx 50\%$), as well as those works using traces gathered from realistic environments, which typically work at this network load.
- **Heavy load:** In this category we classify those papers approaching *saturation conditions*, i.e., when nodes always have traffic ready to be sent.

Based on these guidelines, we determine for every mechanism the largest savings and the network load under which they were typically achieved, i.e., the tuple $\{\text{savings}, \text{network load}\}$.⁵

It should be noted, though, that following the above guidelines to obtain the tuples is very challenging, given the lack of standardized network conditions and the heterogeneity of metrics, not only across technologies but also within the same technology.⁶ Sill, even

⁵ Note that, for some mechanisms, we took different tuples, in case authors analyzed performance under a large variety of scenarios.

⁶ As we will discuss in Section 5, this lack of standardized benchmarks constitutes one of the major research gaps in green wireless communications.

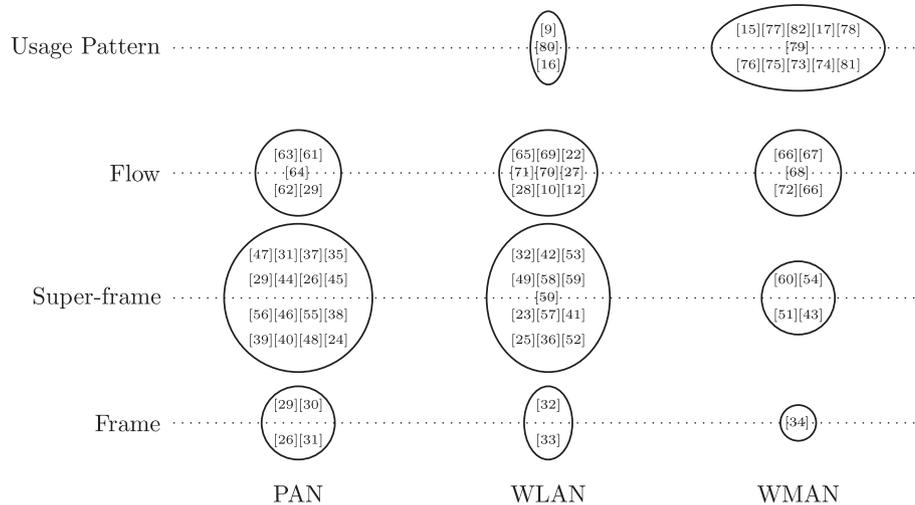


Fig. 4. State-of-the-art distribution wrt. operational time-scale and technology family.

if our methodology should be taken with some caution, the obtained results are very illustrative, as we discuss next.

Following the analysis of each solution, we depict in Fig. 3 the different tuples obtained for the considered references,⁷ marking with a different point style each network scope (PAN, WLAN, WMAN). Based on the results from the figure, we derive the following observations:

- The range of savings obtained is very wide (from 10% to almost 95%), and relatively well sampled as well. Although most of the contributions are located in the [50%,95%] range, there are references providing savings as low as 10%. We believe that the 10% value could be regarded as a performance gain threshold, indicating whether a mechanism would be worth deploying or not.
- The range of network load considered in the literature is very wide as well, with most of the contributions focused towards the light load regime, but with several contributions in the medium to heavy range. As compared to the previous dimension, though, it is clear that the density of mechanisms proposed for heavy load conditions is relatively small.
- All three network scopes (PAN, WLAN, WMAN) are well spread across the figure, as no cluster of points from the same technology can be easily identified. Furthermore, all network scopes are represented in the three network load regions. Remarkably, even the PAN technology, which is typically used for periodic data polling, is represented in the heavy load region.

Another key conclusion we draw from the figure is that the network load has a significant impact on the savings that can be achieved. Indeed, while for heavy load regimes the savings range between 10% to 40%, for the case of light loads they span in the 50% to 95% range. This is easily explained based on the type of mechanism considered for each load: for the case of heavy loads, the mechanisms aim at optimizing the behavior of wireless technologies, which are already efficiently designed, hence there is relatively little room for improvement; in contrast, for the case of light loads, most of the approaches can be classified as *MAC on demand*, and therefore instead of optimizing, e.g., the MAC scheduling, they rather completely switch off the interface, thus leading to large reductions in energy consumption.

Finally, it is worth noting that there are a few *outliers* in the figure that do not follow the observed behavior of savings vs. load, namely [90,73,49]. In [90], authors consider the overall consumption of the device, and not the wireless interface itself, therefore savings are relatively moderate; in the case of [73], the proposed WLAN mechanism supports powering down also part of the wired DSL infrastructure, thus leading to larger gains; finally, the large savings introduced by [49] are obtained by non-standard mechanisms, namely, replacing channel sensing and backoff by a sleep mode, which introduces some fairness considerations with respect to standard stations.

4.3. Distribution of research efforts

We complete our analysis of the studied state-of-the art proposals for green wireless communications by giving a view on the volume of research targeting each network scope, with respect to the operational time-scale classification introduced. Specifically, our goal is to identify the main research trends in the recent years, accounting for the particularities of each family of technologies, and potentially pinpoint the areas where more work is required. To this end, in Fig. 4 we depict the distribution of the solutions reviewed, considering the two aforementioned aspects.

The trend observable in the figure is inline with our discussion on the main sources of energy consumption presented in Section 2. Since the main sources of energy consumption for the PAN family of protocols resides at the radio, research has been focused on the short and medium time-scale. Conversely, the primary source of expenditure on WMAN technologies is related to the power consumption of the base stations, hence, the research in this area has been mainly focused on techniques to reduce the number of active base stations (long term optimizations). In contrast, the approaches designed for WLAN are spread over all time-scales, since significant energy savings can be achieved both by improving the transmission and MAC procedures (short time-scale) and by minimizing the number of active APs when the network load is reduced (long time-scale).

5. Open challenges and future directions

In light of the work analyzed so far, which covers the most important directions in the field of green wireless networking research, we are now ready to identify open challenges and future research directions. Specifically, as detailed in the following para-

⁷ We left out those references in which it was not possible to identify one of these two variables.

graphs, we are envisioning an increasing interest in: (i) *standardizing benchmarks* to provide an homogeneous performance evaluation framework; (ii) studying ways to gain the most out of the *combination* of different green networking proposals; (iii) employing novel *agile radios* to efficiently use the spectrum; (iv) providing low-cost platforms to enable the diffusion of academic *experimentation* in the WMAN field; and, finally (v) designing low consumption networks and protocols, which permit the utilization of off-the-grid *renewable sources* of energy.

Standardizing benchmarks. The concern on the energy consumption of IT equipment has triggered a lot of attention from the research community. Given the variety of methodologies, devices and network scopes, this has resulted in a notable heterogeneity of power consumption models and performance evaluation figures (we have hinted at part of this issue in Section 4.2). Therefore, one key challenge to address is the lack of a common vision with respect to these two main variables, namely, the power consumption of the equipment and the improvements introduced by the proposed mechanisms. To this end, some recent approaches have proposed a common benchmark for the energy consumption of network devices [91], and a framework for the analysis of energy efficiency in communication networks [92], but whether these will be adopted as *de facto* standards by the research community is unknown. We envision more effort in this area, which would help to compare existing approaches and to understand which mechanisms are better suited for a given scenario.

Combining different approaches. Another challenge, related to the lack of a standard framework, is analyzing whether combining existing proposals could provide any benefit. Indeed, given the lack of a common specification, it is hard to evaluate the possible gains of, e.g., using a resource-on-demand protocol with a per-frame optimization of the modulation and coding scheme. Given the proliferation of heterogeneous devices and the availability of new, more flexible mechanisms like, e.g. Wi-Fi Direct [93], we believe that the problem of how to combine different energy saving proposals (this including proposals aimed at different network scopes) will receive further attention.

Emergence of agile radios. Recent advances in software defined radio technologies have opened new avenues towards improved spectrum utilization, new medium access paradigms (e.g., SDMA), more robust communications, as well as advanced dynamic power control techniques and faster channel/interface switching times. From the energy expenditure perspective, among the immediate benefits of employing such agile hardware we identify improved interference mitigation, lower channel access times, resilience to channel errors, etc. Consequently, increasing research efforts are likely to be focused on developing energy efficient solutions that exploit the advantages of cognitive networking, smart antenna systems and cooperative techniques, such as, e.g., the work currently carried out within the ICT C2POWER⁸ and ICT SACRA⁹ research projects.

Experimentation in WMAN. Due to their prohibitive installation costs, WMAN systems have been scarcely investigated from an experimental point of view. A few works report on prototype experimentation (e.g., [72]), other works report on measurements in operational networks (e.g., [74]), or on smartly extending 802.11 access over metropolitan areas (e.g., [73]). In particular, deploying base stations for testing has been so far impracticable, and only network operators have conducted experiments with a few mobile base stations. However, base stations are evolving towards low form factors and low power consumption [3], which paves the

way to the deployment of fully operational and experimental WMAN topologies without the need for connecting to the electrical grid or for transporting huge pieces of equipment. As a consequence, power-efficient wireless protocols and devices will soon allow for on-site WMAN experimentation at the cost of few thousands Euros for a lightweight testbed, instead of the several tens of thousand Euros needed to deploy traditional base stations on street lampposts or towers. Another challenging issue, which prevents today's wide diffusion of WMAN testbeds, is the lack of general-purpose devices that can be operated without the support of vendors and network providers. In fact, all base stations available on the market are closed systems that cannot be easily configured and cannot be easily re-programmed to modify protocols and resource management mechanisms. A few European projects exist in the Seventh Frame Programme, which are currently addressing this issue with the aim of providing flexible and programmable platforms for schedule based MAC, e.g., ICT FLAVIA,¹⁰ and ICT ACROPOLIS.¹¹

Solutions based on renewable sources. Power efficiency is particular appealing not only because it allows to save energy and money, but also because it enables the development of green devices, generating a sustainable CO₂ footprint. In turn, installing power-efficient devices makes it possible to operate wideband wireless systems by means of renewable energy generators, which are scarcely reliable in terms of guaranteed power generation, and necessitate massive deployments for generating large amount of power. As pointed out in [3], wind or solar based power generators, or a combination of the two, are now suitable to supply base station systems with limited capital expenditures. Indeed, it is possible to run a trisectorial 3G base station covering several square kilometers, by placing solar panels on a small surface (a few square meters). Note that, the enhancements in both the efficiency of renewable power generators and in the power utilization at the wireless devices, promise to make realistic the wireless data coverage of entire cities at zero CO₂ impact.

6. Summary

Today's wireless technologies play a primary role in the networking market and they are currently facing a re-design process, aiming at greening their impact on operational costs and pollution. So far the research has focused, on one hand, on battery powered devices that require low-power MAC technologies to maintain a reasonable lifetime for day by day operation. On the other hand, since the overall energy consumption constitutes a large portion of operators' OPEX, the research has also focused on energy-efficient deployments of broadband wireless networks such as WLANs and WMANs.

In this work, after classifying the relevant literature on green wireless networking according to its PAN, WLAN or WMAN nature, we undertook a power consumption analysis for different types of devices, identifying the key sources of poor energy efficiency in currently deployed wireless networks. In particular, we have found inefficiencies at various architectural levels, including hardware, PHY and MAC layers, and wireless routing schemes.

An accurate analysis of the existing body of work has revealed that green enhancement proposals would affect the network operation at various time-scales, i.e., from a frame level time-scale to a usage pattern time-scale, which covers network reconfiguration and re-deployment. He have discussed to which extent analysis, simulations or experimental methodologies can be employed in

⁸ "Cognitive Radio and Networking for Cooperative Coexistence of Heterogeneous Wireless Network" project—<http://www.ict-c2power.eu>.

⁹ "Spectrum and Energy efficiency through multi-band Cognitive Radio" project—<http://www.ict-sacra.eu>.

¹⁰ "Flexible Architecture for Virtualizable future wireless Internet Access" project—<http://www.ict-flavia.eu>.

¹¹ "Advanced coexistence technologies for radio optimization in licensed and unlicensed spectrum" Network of Excellence—<http://www.ict-acropolis.eu>.

attempting to ameliorate the efficiency and have compared quantitatively the reported performance gains. We have also identified interesting relations between networks' operational properties, i.e., coverage and operational load, and characteristics of the proposed greening mechanisms, i.e., achievable savings and operational time-scales of the proposed enhancements.

The classification of existing proposals according to operational time-scales also shows that the problem of energy efficiency cannot be solved at just one level, but require complementary approaches that handle the inefficiency of the network at all layers, including PHY, MAC, routing operation and network planning. In particular, we have identified the main challenges and the most promising research directions towards a greener and more sustainable wireless networking.

Acknowledgments

This work has been supported by the European Community's Seventh Framework Programme (FP7-ICT-2009-5) under Grant agreement No. 257263 (FLAVIA project), and by the Spanish Government, MICINN, under research Grant TEC2011-29688-CO2-02. The authors are grateful to the anonymous referees for their comments which helped in improving the paper.

References

- [1] Cisco Visual Networking Index: Global Mobile Data Traffic Forecast Update, 2011–2016, White paper, Cisco Systems Inc., 2012.
- [2] C. Jones, K. Sivalingam, P. Agrawal, J. Chen, A survey of energy efficient network protocols for wireless networks, *Kluwer Wireless Networks* 7 (2001) 343–358.
- [3] V. Mancuso, S. Alouf, Reducing costs and pollution in cellular networks, *IEEE Communications Magazine* 49 (2011) 63–71.
- [4] X. Wang, A.V. Vasilakos, M. Chen, Y. Liu, T.T. Kwon, A Survey of Green Mobile Networks: Opportunities and Challenges, *Springer Mobile Networks and Applications* 17 (2012) 4–20.
- [5] G. Anastasi, M. Conti, E. Gregori, A. Passarella, 802.11 Power-saving mode for mobile computing in Wi-Fi hotspots: limitations, enhancements and open issues, *Kluwer, Wireless Networks* 14 (2008) 745–768.
- [6] S. Tsao, C. Huang, A survey of energy efficient MAC protocols for IEEE 802.11 WLAN, *Elsevier Computer Communications* 34 (2011) 54–67.
- [7] G. Anastasi, M. Conti, M. Di Francesco, A. Passarella, Energy conservation in wireless sensor networks: a survey, *Elsevier Ad Hoc Networks* 7 (2009) 537–568.
- [8] O. Arnold, F. Richter, G. Fettweis, O. Blume, Power consumption modeling of different base station types in heterogeneous cellular networks, in: *Proceedings of the Future Network and MobileSummit Conference*, 2010.
- [9] A. Jardosh, K. Papagiannaki, E. Belding, K. Almeroth, G. Iannaccone, B. Vinnakota, Green WLANs: on-demand WLAN infrastructures, *Springer Mobile Networks and Applications* 14 (2009) 798–814.
- [10] N. Mishra, K. Chebrolu, B. Raman, A. Pathak, Wake-on-WLAN, in: *Proceedings of the 15th International Conference on World Wide Web*, ACM, 2006, pp. 761–769.
- [11] H. Falaki, R. Mahajan, D. Estrin, Systemsens: a tool for monitoring usage in smartphone research deployments, in: *Proceedings of the 6th International Workshop on Mobility in the Evolving Internet Architecture*, ACM, 2011.
- [12] J. Yoo, K. Park, A cooperative clustering protocol for energy saving of mobile devices with wlan and bluetooth interfaces, *IEEE Transactions on Mobile Computing* 10 (2011) 491–504.
- [13] B. Rengarajan, G. Rizzo, M. Ajmone Marsan, Bounds on QoS-constrained energy savings in cellular access networks with sleep modes, in: *Proceedings of the 23rd International Teletraffic Congress (ITC)*, IEEE, 2011, pp. 47–54.
- [14] J. Louhi, Energy efficiency of modern cellular base stations, in: *Proceedings of the 29th International Telecommunications Energy Conference*, IEEE, 2007, pp. 475–476.
- [15] M. Ajmone Marsan, L. Chiaraviglio, D. Ciullo, M. Meo, Switch-off transients in cellular access networks with sleep modes, in: *Proceedings of the International Conference on Communications Workshops*, IEEE, 2011, pp. 1–6.
- [16] M. Ajmone Marsan, L. Chiaraviglio, D. Ciullo, M. Meo, A simple analytical model for the energy-efficient activation of access points in dense WLANs, in: *Proceedings of the first International Conference on Energy-Efficient Computing and Networking*, ACM, 2010, pp. 159–168.
- [17] A. Chatzipapas, S. Alouf, V. Mancuso, On the minimization of power consumption in base stations using on/off power amplifiers, in: *Proceedings of IEEE Greencom (Online conference)*, 2011.
- [18] X. Pérez-Costa, D. Camps-Mur, IEEE 802.11e QoS and power saving features overview and analysis of combined performance, *IEEE Wireless Communications* 17 (2010) 88–96.
- [19] Q. Wang, W. Yang, Energy consumption model for power management in wireless sensor networks, in: *Proceedings of the fourth Annual IEEE Communication Society Conference on Sensor, Mesh and Ad Hoc Communications and Networks*, 2007, pp. 142–151.
- [20] Power Consumption and Energy Efficiency Comparisons of WLAN Products, White paper, Atheros Communications, 2004. (Last accessed on June eighth, 2011).
- [21] I. Howitt, R. Neto, J. Wang, J. Conrad, Extended energy model for the low rate WPAN, in: *International Conference on Mobile Adhoc and Sensor Systems Conference*, IEEE, 2005, pp. 8–322.
- [22] L. Feeney, M. Nilsson, Investigating the energy consumption of a wireless network interface in an ad hoc networking environment, in: *Proceedings of the 21th Annual Joint Conference of the IEEE Computer and Communications Societies (INFOCOM)*, vol. 3, 2001, pp. 1548–1557.
- [23] A. Garcia-Saavedra, P. Serrano, A. Banchs, M. Hollick, Energy-efficient fair channel access for IEEE 802.11 WLANs, in: *Proceedings of the IEEE International Symposium on World of Wireless Mobile and Multimedia Networks (WoWMoM)*, 2011.
- [24] T. Park, T. Kim, J. Choi, S. Choi, W. Kwon, Throughput and energy consumption analysis of IEEE 802.15.4 slotted CSMA/CA, *Electronics Letters* 41 (2005) 1017–1019.
- [25] E. Jung, N. Vaidya, An energy efficient MAC protocol for wireless LANs, in: *Proceedings of the 22nd Annual Joint Conference of the IEEE Computer and Communications Societies (INFOCOM)*, vol. 3, 2002, pp. 1756–1764.
- [26] H. Wang, N. Agoulmine, M. Ma, Y. Jin, Network lifetime optimization in wireless sensor networks, *IEEE Journal on Selected Areas in Communications* 28 (2010) 1127–1137.
- [27] D. Blough, P. Santi, Investigating upper bounds on network lifetime extension for cell-based energy conservation techniques in stationary ad hoc networks, in: *Proceedings of the 8th annual International Conference on Mobile computing and networking*, ACM, pp. 183–192.
- [28] A. Sharma, V. Navda, R. Ramjee, V. Padmanabhan, E. Belding, Cool-Tether: energy efficient on-the-fly wifi hot-spots using mobile phones, in: *Proceedings of the 5th International Conference on Emerging networking experiments and technologies*, ACM, 2009, pp. 109–120.
- [29] X. Wang, Y. Ren, J. Zhao, Z. Guo, R. Yao, Energy efficient transmission protocol for UWB WPAN, *Proceedings of the 60th Vehicular Technology Conference (VTC)*, vol. 7, IEEE, 2004, pp. 5292–5296.
- [30] Y. Joo, Y. Lee, G. Yang, S. Lee, CSMA/CA protocol based energy efficient transmission scheme for wireless pans, in: *Proceedings of the International Conference on Wireless communications and mobile computing*, ACM, 2007, pp. 635–640.
- [31] Q. Ren, Q. Liang, Throughput and energy-efficiency-aware protocol for ultrawideband communication in wireless sensor networks: a cross-layer approach, *IEEE Transactions on Mobile Computing* 7 (2008) 805–816.
- [32] D. Qiao, K. Shin, Z. Abichar, Energy-conservation in 802.11 WLANs via transmission-strategy-aware airtime allocation, *Elsevier Computer Networks* 52 (2008) 2280–2291.
- [33] D. Qiao, S. Choi, K. Shin, Interference analysis and transmit power control in IEEE 802.11 a/h wireless LANs, *IEEE/ACM Transactions on Networking* 15 (2007) 1007–1020.
- [34] X. Ge, J. Hu, C.-X. Wang, C.-H. Youn, J. Zhang, X. Yang, Energy Efficiency Analysis of MISO-OFDM Communication Systems Considering Power and Capacity Constraints, *Springer, Mobile Networks and Applications* 17 (2012) 29–35.
- [35] W. Ye, J. Heidemann, D. Estrin, Medium access control with coordinated adaptive sleeping for wireless sensor networks, *IEEE/ACM Transactions on Networking* 12 (2004) 493–506.
- [36] J. Chen, K. Cheng, EDCA/CA: Enhancement of IEEE 802.11e EDCA by contention adaption for energy efficiency, *IEEE Transactions on Wireless Communications* 7 (2008) 2866–2870.
- [37] X. Chen, Y. Xiao, Y. Cai, J. Lu, Z. Zhou, An energy diffserv and application-aware MAC scheduling for VBR streaming video in the IEEE 802.15. 3 high-rate wireless personal area networks, *Elsevier Computer communications* 29 (2006) 3516–3526.
- [38] B. Otal, L. Alonso, C. Verikoukis, Highly reliable energy-saving MAC for wireless body sensor networks in healthcare systems, *IEEE Journal on Selected Areas in Communications* 27 (2009) 553–565.
- [39] H. Li, J. Tan, Heartbeat driven medium access control for body sensor networks, in: *Proceedings of the first ACM SIGMOBILE International Workshop on Systems and Networking Support for Healthcare and Assisted Living, Environments*, 2007, pp. 25–30.
- [40] O. Omeni, A. Wong, A. Burdett, C. Toumazou, Energy efficient medium access protocol for wireless medical body area sensor networks, *IEEE Transactions on Biomedical Circuits and Systems* 2 (2008) 251–259.
- [41] D. Qiao, S. Choi, A. Soomro, K. Shin, Energy-efficient PCF operation of IEEE 802.11a wireless LAN, in: *Proceedings of the 22th Annual Joint Conference of the IEEE Computer and Communications Societies (INFOCOM)*, vol. 2, 2002, pp. 580–589.
- [42] E. Rozner, V. Navda, R. Ramjee, S. Rayanchu, Napman: network-assisted power management for wifi devices, in: *Proceedings of the 8th International Conference on Mobile systems, applications, and services*, ACM, pp. 91–106.
- [43] A. Schulman, V. Navda, R. Ramjee, N. Spring, P. Deshpande, C. Grunewald, K. Jain, V. Padmanabhan, Bartendr: a practical approach to energy-aware cellular data scheduling, in: *Proceedings of the 16th Annual International Conference on Mobile Computing and Networking*, ACM, 2010, pp. 85–96.

- [44] G. Chalhouh, A. Guitton, M. Misson, MAC specifications for a WPAN allowing both energy saving and guaranteed delay, Springer, IFIP International Federation for Information Processing, Wireless Sensor and Actor Networks II 264 (2008) 221–232.
- [45] B. Otal, C. Verikoukis, L. Alonso, Efficient power management based on a distributed queuing MAC for wireless sensor networks, in: Proceedings of the 65th Vehicular Technology Conference (VTC), IEEE, 2007, pp. 105–109.
- [46] G. Fang, E. Dutkiewicz, BodyMAC: Energy efficient TDMA-based MAC protocol for wireless body area networks, in: Proceedings of the 9th International Symposium on Communications and Information Technology, IEEE, 2009, pp. 1455–1459.
- [47] M. Valero, A. Bourgeois, R. Beyah, DEEP: a deployable energy efficient 802.15.4 MAC protocol for sensor networks, in: Proceedings on the IEEE International Conference on Communications (ICC), 2010, pp. 1–6.
- [48] J. Polastre, J. Hill, D. Culler, Versatile low power media access for wireless sensor networks, in: Proceedings of the Second International Conference on Embedded networked sensor systems, ACM, 2004, pp. 95–107.
- [49] V. Baiamonte, C. Chiasserini, Saving energy during channel contention in 802.11 wlans, Springer, Mobile Networks and Applications 11 (2006) 287–296.
- [50] X. Zhang, K. Shin, E-MiLi: energy-minimizing idle listening in wireless networks, Proceedings of the 17th annual International Conference on Mobile computing and networking, ACM, 2011, pp. 205–216.
- [51] V. Mancuso, S. Alouf, Power save analysis of cellular networks with continuous connectivity, in: Proceedings of the IEEE International Symposium on World of Wireless Mobile and Multimedia Networks (WoWMoM), 2011.
- [52] X. Chen, S. Jin, D. Qiao, M-PSM: Mobility-Aware Power Save Mode for IEEE 802.11 WLANs, Proceedings of the 31st International Conference on Distributed Computing Systems (ICDCS), IEEE, 2011, pp. 77–86.
- [53] J. Manweiler, R. Choudhury, Avoiding the rush hours: WiFi energy management via traffic isolation, in: Proceedings of the Ninth international conference on Mobile systems, applications, and services (MobiSys), 2011.
- [54] S. Alouf, E. Altman, A. Azad, M/G/1 queue with repeated inhomogeneous vacations applied to IEEE 802.16 e power saving, in: Proceedings of the 2008 ACM SIGMETRICS International Conference on Measurement and modeling of computer systems.
- [55] P. Suarez, C. Renmarker, A. Dunkels, T. Voigt, Increasing ZigBee network lifetime with X-MAC, Proceedings of the workshop on Real-world wireless sensor networks, ACM, 2008, pp. 26–30.
- [56] X. Zhang, H. Jiang, X. Chen, L. Zhang, Z. Wang, An energy efficient implementation of on-demand MAC protocol in medical Wireless Body Sensor Networks, in: Proceedings of the IEEE International Symposium on Circuits and Systems (ISCAS), 2009, pp. 3094–3097.
- [57] V. Nambodiri, L. Gao, Towards energy efficient VoIP over wireless LANs, in: Proceedings of the Ninth ACM international symposium on Mobile ad hoc networking and computing, 2008, pp. 169–178.
- [58] Y. Jiao, A. Hurson, B. Shirazi, Adaptive application-driven WLAN power management, Elsevier Pervasive and Mobile Computing 3 (2007) 255–275.
- [59] Y. Agarwal, R. Chandra, A. Wolman, P. Bahl, K. Chin, R. Gupta, Wireless wakeups revisited: energy management for VoIP over WiFi smartphones, Proceedings of the Fifth International Conference on Mobile systems, applications and services, ACM, 2007, pp. 179–191.
- [60] M. Kirgaard, J. Langdal, T. Godsk, T. Toftkj, Entracked: energy-efficient robust position tracking for mobile devices, in: Proceedings of the Seventh International Conference on Mobile systems, applications, and services, ACM, 2009, pp. 221–234.
- [61] M. Ilyas, H. Radha, Increasing Network Lifetime Of An IEEE 802.15.4 Wireless Sensor Network By Energy Efficient Routing, in: Proceedings of the IEEE International Conference on Communications (ICC), vol. 9, 2006, pp. 3978–3983.
- [62] P. Hao, W. Qiu, R. Evans, An Energy-Efficient Cluster-Head Selection Protocol for Energy-Constrained Wireless Sensor Networks, Springer Ad Hoc Networks, 28, Springer, Berlin Heidelberg, 2010, pp. 19–32.
- [63] A. Bari, S. Wazed, A. Jaekel, S. Bandyopadhyay, A genetic algorithm based approach for energy efficient routing in two-tiered sensor networks, Elsevier Ad Hoc Networks 7 (2009) 665–676.
- [64] A. Chamam, S. Pierre, On the Planning of Wireless Sensor Networks: Energy-Efficient Clustering under the Joint Routing and Coverage Constraint, IEEE Transactions on Mobile Computing 8 (2009) 1077–1086.
- [65] A. Srinivas, E. Modiano, Minimum energy disjoint path routing in wireless ad-hoc networks, Proceedings of the Ninth annual International Conference on Mobile computing and networking, ACM, 2003, pp. 122–133.
- [66] C. Levy-Benchenon, G. Villemaud, Power consumption optimization in multi-mode mobile relay, in: European Wireless Technology Conference (EuWIT), 2009, pp. 61–64.
- [67] X. Wang, Y. Bao, X. Liu, Z. Niu, On the design of relay caching in cellular networks for energy efficiency, in: Proceedings of the IEEE Conference on Computer Communications Workshops (INFOCOM Workshops), 2011, pp. 259–264.
- [68] J. Xu, L. Qiu, Area Power Consumption in a Single Cell Assisted by Relays, in: Proceedings of the IEEE/ACM on International Conference on Cyber, Physical and Social Computing (CPSCom) and Green Computing and Communications (GreenCom), 2010, pp. 460–465.
- [69] S. Jin, K. Han, S. Choi, A novel idle mode operation in IEEE 802.11 WLANs: Prototype Implementation and Empirical Evaluation, Proceedings of the 4th international workshop on Wireless mobile applications and services on WLAN hotspots, ACM, 2006, pp. 71–80.
- [70] S. Jin, K. Han, S. Choi, Idle Mode for Deep Power Save in IEEE 802.11 WLANs, 2010, Journal of Communications and Networks 12 (2010) 480–491.
- [71] M. Liebsch, X. Pérez-Costa, Utilization of the IEEE802.11 power save mode with IP paging, in: IEEE International Conference on Communications (ICC), 2005, vol. 2, pp. 1383–1389.
- [72] M. Ra, J. Paek, A. Sharma, R. Govindan, M. Krieger, M. Neely, Energy-delay tradeoffs in smartphone applications, Proceedings of the Eighth International Conference on Mobile systems, applications, and services, ACM, 2010, pp. 255–270.
- [73] E. Goma, M. Canini, A. Lopez Toledo, N. Laoutaris, D. Kostić, P. Rodriguez, R. Stanojević, P. Yagué Valentin, Insomnia in the Access or How to Curb Access Network Related Energy Consumption, in: Proceedings of the ACM Special Interest Group on Data Communication (SIGCOMM) Conference, 2011.
- [74] C. Peng, S. Lee, S. Lu, H. Luo, H. Li, Traffic-driven power saving in operational 3G cellular networks, Proceedings of the 17th annual International Conference on Mobile computing and networking, ACM, 2011, pp. 121–132.
- [75] K. Dufková, M. Bjelica, B. Moon, L. Kencl, J. Le Boudec, Energy savings for cellular network with evaluation of impact on data traffic performance, Proceedings of the European Wireless Conference (EW), IEEE, 2010, pp. 916–923.
- [76] M. Ajmone Marsan, L. Chiaraviglio, D. Ciullo, M. Meo, Optimal energy savings in cellular access networks, in: Proceedings of the IEEE International Conference on Communications Workshops (ICC), 2009, pp. 1–5.
- [77] M. Ajmone Marsan, M. Meo, Energy efficient management of two cellular access networks, ACM SIGMETRICS Performance Evaluation Review 37 (2010) 69–73.
- [78] A. Conte, A. Feki, L. Chiaraviglio, D. Ciullo, M. Meo, M. Ajmone Marsan, Cell wilting and blossoming for energy efficiency, IEEE Wireless Communications 18 (2011) 50–57.
- [79] L. Chiaraviglio, D. Ciullo, M. Meo, M. Ajmone Marsan, Energy-efficient management of UMTS access networks, Proceedings of the 21st International Teletraffic Congress (ITC), IEEE, 2009, pp. 1–8.
- [80] D. Blough, P. Santi, Investigating upper bounds on network lifetime extension for cell-based energy conservation techniques in stationary ad hoc networks, Proceedings of the 8th annual International Conference on Mobile computing and networking, ACM, 2002, pp. 183–192.
- [81] Z. Niu, Y. Wu, J. Gong, Z. Yang, Cell zooming for cost-efficient green cellular networks, IEEE Communications Magazine 48 (2010) 74–79.
- [82] S. Bhaumik, G. Narlikar, S. Chattopadhyay, S. Kanugovi, Breathe to stay cool: adjusting cell sizes to reduce energy consumption, in: Proceedings of the first ACM SIGCOMM workshop on Green networking, 2010, pp. 41–46.
- [83] IEEE Standard for Information Technology- Telecommunications and Information Exchange Between Systems- Local and Metropolitan Area Networks- Specific Requirements Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) specifications, 2007.
- [84] S. Ramabhadran, J. Pasquale, Stratified Round Robin: A Low Complexity Packet Scheduler with Bandwidth Fairness and Bounded Delay, in: Proceedings of the ACM Special Interest Group on Data Communication (SIGCOMM) Conference, 2003.
- [85] P. Agrawal, A. Kumar, J. Kuri, M. Panda, V. Navda, R. Ramjee, V. Padmanabhani, Analytical models for energy consumption in infrastructure WLAN STAs carrying TCP traffic, Proceedings of the 2nd International Conference on Communication Systems and Networks (COMSNETS), IEEE, 2010, pp. 1–10.
- [86] 3GPP TS 25.214, Physical Layer Procedures (FDD), release 8, v8.9.0, 2010.
- [87] IEEE Standard for Information Technology- Telecommunications and Information Exchange Between Systems- Local and Metropolitan Area Networks- Specific Requirements Part 16: Air Interface for Fixed and Mobile Broadband Wireless Access Systems, 2006a.
- [88] IEEE Standard for Information Technology- Telecommunications and Information Exchange Between Systems- Local and Metropolitan Area Networks- Specific Requirements Part 16: Air Interface for Fixed and Mobile Broadband Wireless Access Systems - Amendment 2: Physical and Medium Access Control Layers for Combined Fixed and Mobile Operation in Licensed Bands and Corrigendum, 2006b.
- [89] IEEE Standard for Information Technology- Telecommunications and Information Exchange Between Systems- Local and Metropolitan Area Networks- Specific Requirements Part 15.4: Wireless Medium Access Control (MAC) and Physical Layer (PHY) Specifications for Low-Rate Wireless Personal Area Networks (WPANs), IEEE Std 802.15.4-2006 (2006c).
- [90] E. Shih, P. Bahl, M. Sinclair, Wake on wireless: An event driven energy saving strategy for battery operated devices, Proceedings of the 8th annual International Conference on Mobile computing and networking, ACM, 2002, pp. 160–171.
- [91] P. Mahadevan, P. Sharma, S. Banerjee, P. Ranganathan, A power benchmarking framework for network devices, in: Proceedings of the Eighth International IFIP-TC6 Networking Conference (NETWORKING), 2009, pp. 795–808.
- [92] A.P. Bianzino, A.K. Raju, D. Rossi, Apples-to-apples: a framework analysis for energy-efficiency in networks, SIGMETRICS Perform. Eval. Rev. 38 (2011) 81–85.
- [93] D. Camps-Mur, X. Pérez-Costa, S. Sallent-Ribes, Designing energy efficient access points with wi-fi direct, Computer Networks 55 (2011) 2838–2855.